

ZAXIS-5G series

HITACHI

Reliable solutions

ZAXIS70



HYDRAULIC EXCAVATOR

Model Code : ZX70-5G / ZX70LC-5G

Engine Rated Power : 42.4 kW (56.9 HP)

Operating Weight : ZX70-5G : 6 650 - 6 950 kg

: ZX70LC-5G : 6 710 - 7 020 kg

Backhoe Bucket : ISO Heaped : 0.13 - 0.33 m³

ZAXIS Empower your Vision.

The new ZX70 has evolved with a number of improvements including engine torque, durability and maintainability to earn more production and profits. It is rugged and sturdy for operation under tough environment, reducing downtime. Maintenance is also simplified to increase uptime.

The new ZX70 empowers your visions and dreams, shaping your future.



Shown equipped with an optional 4-side reinforced arm and pre-cleaner.



More Production with Less Fuel

Page 4-5

- 7% less fuel consumption
- 22% more engine torque
- Improved heat balance
- Low-effort pilot lever

Operator Comfort

Page 6

- Comfortable operating environment
- Full-auto air conditioner (Standard)
- OPES cab



Highest Criteria of Sturdiness and Durability

Page 7

- WC thermal spraying at arm-bucket joint
- Reinforced bucket (Optional)
- 4-side reinforced arm (Optional)
- Track frame undercover (Optional)



Hitachi Heritage of High Maintainability

Page 8

- Fuel double-filters (Standard)
- Dust-proof indoor net
- Easy-to-clean big fuel tank
- Battery disconnect switch (Optional)



Hitachi Support Chain

Page 9

- Parts and service




Note: The pictured ZX70 is equipped with an optional black.

More Production with Less Fuel. Meeting Two Competing Needs



New electronically-controlled engine

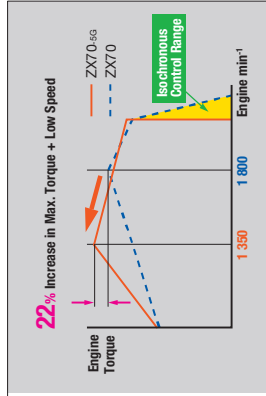

Covers with higher cooling efficiency

7% Down Fuel Consumption*

Hitachi fuel-saving technology is more evolved than ever. The electronically controlled engine can curb fuel consumption behind the electronic governor, clutch fan, and isochronous control, which is one of fuel-saving technologies that can automatically control engine rpm through the electronic governor. This can suppress the engine speed increase when big output is not needed, leading to less fuel consumption.

*Based on measurements in P mode under standard digging test conditions

22% Up Engine Torque

The new engine is designed to increase its maximum torque to keep running without speed drop at high altitudes with thin air and in hot summer season. At its maximum torque, the speed is kept low to ensure stable performance even under heavy loads.

Improved Heat Balance

Even at high temperatures in summer or in continuous long hours operation, the ZX70 can lessen overheating, as cooling efficiency increases: heat balance is up 4% in engine coolant, and up 12% in hydraulic oil, compared to the conventional.

Low-Effort Pilot Lever

The new fingertip-control pilot lever reduces operator fatigue in long hours operation. This pilot lever resembles the one proven on the ZX200 in the larger class.




Shown equipped with an optional 4-side reinforced arm and pin cleaner.

Enhanced Operator Comfort with Refined Controls and Cab Interior


Highest Criteria of Sturdiness and Durability Gives Higher Productivity



Monitor panel

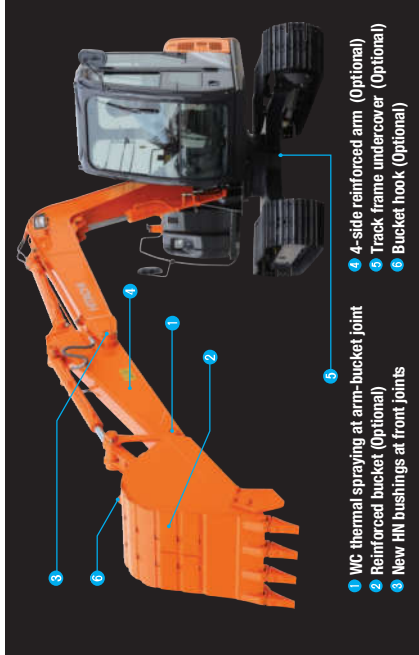

- 1 WC thermal spraying at arm-bucket joint
- 2 Reinforced bucket (Optional)
- 3 New HN bushings at front joints
- 4 4-side reinforced arm (Optional)
- 5 Track frame undercover (Optional)
- 6 Bucket hook (Optional)



New HN bushing




Bucket with reinforced hook(Optional)



4-side reinforced arm(Optional)

Comfortable Operating Environment

The cab is improved to enhance operator comfort and controllability. The monitor panel is positioned for easy reading from the operator. Twin analog meters are easy to read operating status. The simple-to-control switch panel is within easy reach. The comfortable vinyl-made operator seat is provided with a headrest and armrests, and is precisely adjustable to operator's build. It can be reclined and slid for pleasant positioning. Monitor panel indicators are shown in the demonstration. Auto idle and indicators disable.

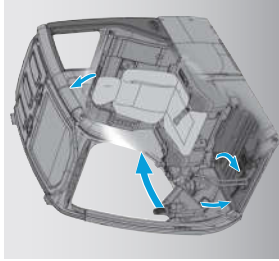

Full-auto air conditioner air outlets

Full-Auto Air Conditioner (Standard)

The full-auto air conditioner can keep preset in-cab temperatures by blowing fresh air. Air flow and outlets are adjusted automatically. Bi-level air flow makes it possible to warm leg space and cool head space simultaneously.



Drink holder




Hot & cool line



One-touch front window lock

Neutral engine start system

The pilot control shut-off lever is provided with a neutral engine start system that permits engine starting only when the pilot control shut-off lever is in Lock position.



Pilot control shut-off lever



Emergency evacuation hammer



Large over head window



Emergency engine stop switch




Right cab guard

CRES* Cab

The CRES cab is reinforced with high-rigidity steel tubes at corners to significantly increase strength and rigidity for higher safety.

*CRES: Corner Reinforced Structure

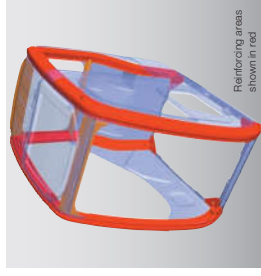

CRES cab

Reinforcing areas shown in red

Hitachi Heritage of High Maintainability to Reduce Downtime

Hitachi Support Chain

Hitachi Support Chain is a full customer support system offered after buying a Hitachi machine.

Fuel Double-Filters (Standard)

Fuel double-filters are utilized in a fuel line from fuel tank to engine to avoid plugging. Also, a solenoid fuel pump is provided standard to release air if water is mixed in fuel or fuel runs out.

Dust-Proof Indoor Net

The radiator is provided with a detachable dust protective net at its front to avoid dust entry. The net is made of three-split type for easy, quick servicing. An air nozzle port at the radiator top facilitates cleaning.

Easy-to-Clean Big Fuel Tank

The fuel tank has the ample capacity of 135 liters. Its inlet is sealed with a keyed cap for water proof type. At the bottom of the fuel tank a drain cock, which serves to easily discharge contaminants inside, and a bolted cleaning port for easy opening and cleaning.

Battery Disconnect Switch (Optional)

This battery disconnect switch is provided to avoid battery discharging and protect harnesses when the machine is not in use in winter or in long-term storage.



Shown equipped with an optional pre-cleaner.



Parts and Service

Hitachi full customer support is available every area on the globe for full customer satisfaction through Hitachi local dealers.

Parts

Hitachi Global Online Network, a parts supply system, is linked with Japan Parts Center, overseas depots and over 150 dealers abroad to deliver on-line parts information, including in-stock parts, order receptions, shipments and delivery period of over one million parts and components.

Genuine Hitachi Parts

Genuine Hitachi parts, meeting Hitachi stringent quality standards, are guaranteed according to Hitachi warranty standards. The use of genuine Hitachi parts, including engine, fuel, hydraulic oil and filters, may slash running costs, and extend machine life.

Ground Engaging Tools (GETs)

Hitachi provides an array of Hitachi Ground Engaging Tools developed and built for a variety of applications. Using high-quality, well-maintained GETs will help you get customers' trust.

Note: Some dealers do not handle Hitachi GETs.

Remanufactured Components

Hitachi components are remanufactured according to the stringent remanufacturing standards at four factories around the world. They have high quality equivalent to new ones, and backed up by Hitachi warranty system.

Note: Some dealers do not handle Hitachi Remanufactured Components.

Service

Extended Warranty — HELP

Hitachi Standard Warranty System is available on all new Hitachi machines. In addition, Hitachi offers Hitachi Extended Life Programs (HELPS) to suit customer expectations – protecting machines under tough operating conditions, avoiding unexpected downtime, and reducing repair costs.

Note: Warranty conditions vary by equipment.

Diagnostic Tools — Maintenance Pro

Electronic control system needs quick on-site solutions, apart from mechanical repairs. Hitachi's Maintenance Pro can diagnose machine failures in a short time by plugging a PC into a failed machine.

Technical Training

On-site servicing matters despite locations to keep the machine at peak performance and reduce downtime. Technical Training Center (TTC), located in Japan, educates and trains service technicians and service support personnel coming from Hitachi dealers and factories on the globe according to the international training programs.



SPECIFICATIONS

ENGINE	
Model	Yanmar 4TNV98-AV/HBW (CHN Stage II)
Type	4-cycle water-cooled, direct injection
No. of cylinders	4
Rated power	
ISO 9249, net	42.4 kW (56.9 HP) at 2 100 min ⁻¹ (rpm)
SAE J1349, net	42.4 kW (56.9 HP) at 2 100 min ⁻¹ (rpm)
Maximum torque	236 Nm (24.1 kgfm) at 1 350 min ⁻¹ (rpm)
Piston displacement ..	3.318 L
Bore and stroke	98 mm x 110 mm
Batteries	2 x 12 V / 52 Ah

HYDRAULIC SYSTEM	
Hydraulic Pumps	
Main pumps	3 variable displacement axial piston pumps
Maximum oil flow ..	2 x 63 L/min
Pilot pump	1 x 52.5 L/min
Maximum oil flow ..	1 gear pump
	21 L/min

Hydraulic Motors	
Travel	2 variable displacement axial piston motors
Swing	1 axial piston motor

Relief Valve Settings	
Implement circuit	26.0 MPa (265 kgf/cm ²)
Swing circuit	22.6 MPa (230 kgf/cm ²)
Travel circuit	31.4 MPa (325 kgf/cm ²)
Pilot circuit	3.9 MPa (40 kgf/cm ²)

Hydraulic Cylinders			
	Quantity	Bore	Rod diameter
Boom	1	115 mm	65 mm
Arm	1	95 mm	60 mm
Bucket	1	85 mm	55 mm
Blade (Optional)	1	120 mm	70 mm

UPPER STRUCTURE	
Revolving Frame	
D-section frame skirt for resistance to deformation.	
Swing Device	
Axial piston motor with planetary reduction gear is bathed in oil. Swing circle is single-row. Swing parking brake is spring-set/hydraulic-released disc type.	
Swing speed	10.7 min ⁻¹ (rpm)
Swing torque	12.9 kNm (1 320 kgfm)

Operator's Cab	
Independent spacious cab, 1 005 mm wide by 1 675 mm high, conforming to ISO [*] Standards.	
[*] International Organization for Standardization	

UNDERCARRIAGE	
Tracks	
Heat-treated connecting pins with dirt seals. Hydraulic (grease) track adjusters with shock-absorbing recoil springs.	
Numbers of Rollers and Shoes on Each Side	
Upper roller	1
Lower rollers	5
Track shoes	38 : ZX70-SG 40 : ZX70LC-SG

Travel Device	
Each track driven by 2-speed axial piston motor.	
Parking brake is spring-set/hydraulic-released disc type.	
Automatic transmission system: High-Low.	
Travel speeds	High : 0 to 5.0 km/h Low : 0 to 3.4 km/h
Maximum traction force ..	47.8 kN (4 870 kgf)
Gradeability	70% (35 degree) continuous

SERVICE REFILL CAPACITIES	
Fuel tank	135.0 L
Engine coolant	8.0 L
Engine oil	11.6 L
Travel device (each side)	2.5 L
Hydraulic system	100.0 L
Hydraulic oil tank	60.0 L

WEIGHTS AND GROUND PRESSURE							
Operating weight and Ground pressure							
Shoe type	Shoe width		ZX70-SG		ZX70LC-SG		
	mm	kg	kPa(kgf/cm ²)	kg	kPa(kgf/cm ²)	kg	kPa(kgf/cm ²)
Triple grouser	450	6 650	31 (0.31)	6 690	31 (0.32)	6 710	29 (0.30)
	600	6 810	24 (0.24)	6 850	24 (0.24)	6 880	23 (0.23)
Pad	450	6 690	31 (0.32)	6 730	31 (0.32)	6 750	29 (0.30)
Triangular	500	6 830	28 (0.28)	6 870	29 (0.29)	6 900	27 (0.27)
	700	6 950	21 (0.21)	6 990	21 (0.21)	7 020	20 (0.20)
Flat	450	6 810	31 (0.32)	6 850	32 (0.32)	6 880	30 (0.30)

Including bucket 0.28 m³ (ISO heaped) weight (211 kg) and counterweight (800 kg).

BUCKET AND ARM DIGGING FORCES		
Arm length	1.62 m	2.12 m
Bucket digging force ISO	55.0 kN (5 600 kgf)	55.0 kN (5 600 kgf)
Bucket digging force SAE : PCSA	47.0 kN (4 800 kgf)	47.0 kN (4 800 kgf)
Arm crowd force ISO	38.0 kN (3 900 kgf)	32.0 kN (3 300 kgf)
Arm crowd force SAE : PCSA	36.0 kN (3 700 kgf)	31.0 kN (3 200 kgf)

BACKHOE ATTACHMENTS	
Boom and arms are of welded, box-section design.	
Bucket is of welded steel structure. Bucket clearance adjust mechanism provided on the bucket joint bracket.	


Buckets					
Capacity	Width		No. of teeth	Weight	
	Without side cutters	With side cutters		Arm 1.62 m	Arm 2.12 m
ISO heaped					
0.13 m ³	360 mm	450 mm	3	141 kg	⊙
0.17 m ³	450 mm	540 mm	3	168 kg	⊙
0.19 m ³	500 mm	590 mm	3	175 kg	⊙
0.23 m ³	550 mm	650 mm	3	186 kg	⊙
0.28 m ³	660 mm	750mm	4	211 kg	⊙ ⊙
0.33 m ³	770 mm	860mm	5	⊙ ⊙	—
*1 0.28 m ³	660 mm	750mm	4	⊙	⊙
Slope-fining blade α With 750 mm, Length 1 500 mm				◇	◇

*1 Reinforced bucket
*2 With 600 mm / 700 mm shoes only
⊙ Suitable for materials with density of 2 000 kg/m³ or less
⊙ Suitable for materials with density of 1 600 kg/m³ or less
◇ Slope-fining service
— Not applicable

Data in () are for ZX70LC-SG.


SPECIFICATIONS

WORKING RANGES

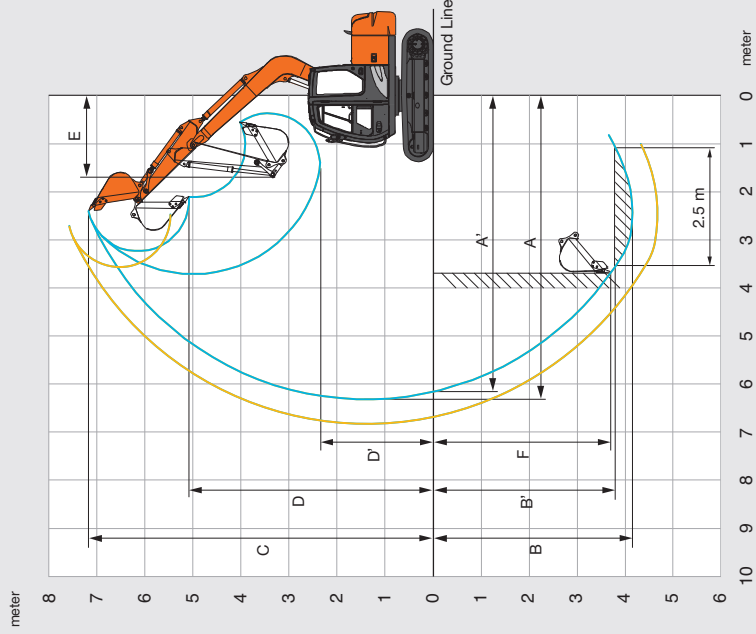


Arm length	1.62 m	2.12 m	Unit: mm
A Max. digging reach	6 320	6 810	
A' Max. digging reach (on ground)	6 170	6 670	
B Max. digging depth	4 170	4 670	
B' Max. digging depth for 2.5 m level	3 800	4 370	
C Max. cutting height	7 150	7 550	
D Max. dumping height	5 080	5 450	
D' Min. dumping height	2 340	1 920	
E Min. swing radius	1 720	2 080	
F Max. vertical wall digging depth	3 730	4 280	
*Excluding track shoe lug			

DIMENSIONS

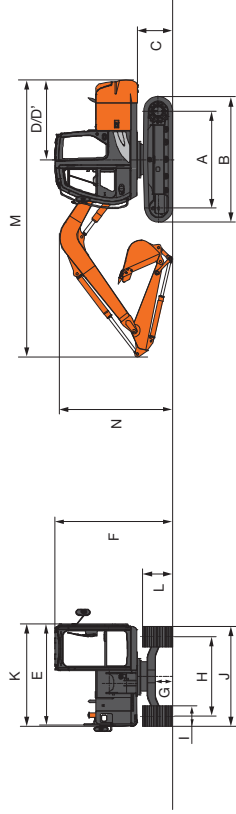

	ZX70-5G	ZX70LC-5G	Unit: mm
A Distance between tumblers	2 140	2 290	
B Undercarriage length	2 765	2 920	
*C Counterweight clearance	760	760	
D Rear-end swing radius	1 750	1 750	
D' Rear-end length	1 750	1 750	
E Overall width of upperstructure	2 260	2 260	
F Overall height of cab	2 600	2 600	
*G Min. ground clearance	360	360	
H Track gauge	1 750	1 750	
I Track shoe width	G 450	G 450	
J Undercarriage width	2 200	2 320	
K Overall width	2 260	2 320	
*L Track height with triple grouser shoes	655	655	
M Overall length	6 080	6 120	
N Overall height of boom	2 550	2 550	
*Excluding track shoe lug G: Triple grouser shoe			

BLADE (Optional)

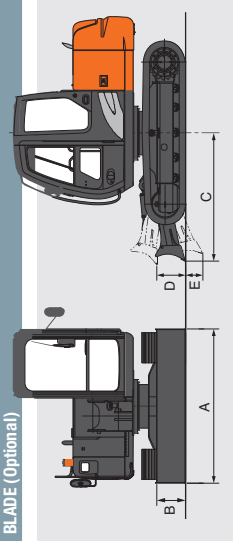

Equipped with triple grouser shoe 450 mm

A Overall width of blade	2 320 mm
B Overall height of blade	435 mm
C Blade distance	1 910 mm
*D Max. raising height above ground	400 mm
*E Max. lowering depth from ground	280 mm
*Excluding track shoe lug	










Shoe type	Shoe width	Operating weight	Ground pressure	ZX70LC-5G
Triple grouser	450 mm	7 200 kg	33 kPa (634 kg/cm²)	Operating weight
				Ground pressure
				32 kPa (324 kg/cm²)














Including bucket 0.28 m³ (ISO heaped) weight (211 kg), arm 1.62 m and counterweight (800 kg).













LIFTING CAPACITIES (Without Bucket)














- Notes: 1. Ratings are based on ISO 10567.
2. Lifting capacity does not exceed 75% of tipping load with the machine on firm, level ground or 87% full hydraulic capacity.
3. The load point is the center-line of the bucket pivot mounting pin on the arm.
4. *Indicates load limited by hydraulic capacity.
5. 0 m = Ground.
For lifting capacities, subtract bucket and quick hitch weight from lifting capacities without bucket.




























ZX70-5g		Load point height m	Rating over-front						Rating over-side or 360 degrees						Unit : kg
Conditions	1.5 m		3.0 m		4.5 m		1.5 m		3.0 m		4.5 m				
															
Boom 3.72 m	4.5														
Arm 1.62 m															
Counterweight	3.0														
800 kg	1.5														
Grouser shoe															
450 mm	0 (Ground)														
	-1.5														

ZX70-5g														Unit : kg
Conditions	Load point height m	Load radius						Rating over-front		Rating over-side or 360 degrees				
		1.5 m		3.0 m		4.5 m				At max. reach				
														
Boom 3.72 m	4.5													
Arm 2.12 m														
Counterweight	3.0													
800 kg														
Grouser shoe	1.5													
450 mm														
0 (Ground)														
-1.5														
-3.0														

ZX70-5g, Blade on Ground		Load point height m	Rating over-front						Rating over-side or 360 degrees						Unit : kg
Conditions	1.5 m		3.0 m		4.5 m		1.5 m		3.0 m		4.5 m				
															
Conditions															
Boom 3.72 m	4.5														
Arm 1.62 m															
Counterweight	3.0														
800 kg	1.5														
Grouser shoe															
450 mm	0 (Ground)														
	-1.5														

ZX70-5G, Blade on Ground														Unit : kg
Conditions	Load point height m	Load radius						Rating over-front		Rating over-side or 360 degrees				
		1.5 m		3.0 m		4.5 m						At max. reach		
														
Boom 3.72 m	4.5													
Arm 2.12 m														
Counterweight	3.0													
800 kg	1.5													
Grouser shoe														
450 mm	0 (Ground)													
	-1.5													
	-3.0													








ZX70-5g, Blade above Ground														Unit :	
Conditions	Load point height m	Rating over-front						Rating over-side or 360 degrees							
		1.5 m		3.0 m		4.5 m		1.5 m		3.0 m		4.5 m			
															
Boom 3.72 m	4.5														
Arm 1.62 m															
Counterweight	3.0														
800 kg	1.5														
Grouser shoe															
450 mm	0 (Ground)														
	-1.5														










ZX70-5G, Blade above Ground														Unit : kg
Conditions	Load point height m	Load radius						Rating over-front		Rating over-side or 360 degrees				
		1.5 m		3.0 m		4.5 m								
														At max. reach
Boom 3.72 m	4.5													
Arm 2.12 m														
Counterweight	3.0													
800 kg														
Grouser shoe	1.5													
450 mm														
0 (Ground)														
	-1.5													
	-3.0													





























LIFTING CAPACITIES (Without Bucket)










- Notes: 1. Ratings are based on ISO 10567.
 2. Lifting capacity does not exceed 75% of tipping load with the machine on firm, level ground or 87% full hydraulic capacity.
 3. The load point is the center-line of the bucket pivot mounting pin on the arm.
 4. *Indicates load limited by hydraulic capacity.
 5. 0 m = Ground.
 For lifting capacities, subtract bucket and quick hitch weight from lifting capacities without bucket.



























ZX70LC-56		Load point height m	Load radius						At max. reach	Unit : kg
Conditions	1.5 m		3.0 m		4.5 m					
										
Boom 3.72 m	4.5			*1 620	*1 620					
Arm 1.62 m										
Counterweight	3.0			*2 180	*2 180	1 810	1 470		*1 560	*1 560
800 kg	1.5			*3 090	2 540	1 740	1 410	1 380	1 250	5.00
Grouser shoe										
450 mm	0 (Ground)				2 420	1 690	1 350	1 430	1 150	5.10
	-1.5	*4 420	*4 420	3 110	2 410				1 750	1 400

ZX70LC-56		Load point height m	Rating over-front				Rating over-side or 360 degrees				Unit : kg
Conditions	1.5 m		3.0 m		4.5 m		At max. reach				
											
Boom 3.72 m	4.5										
Arm 2.12 m											
Counterweight	3.0										
800 kg	1.5										
Grouser shoe											
450 mm	0 (Ground)										
	-1.5										
	-3.0										

ZX70LC-56, Blade on Ground										Unit : kg
Conditions	Load point height m	Load radius				Rating over-front		Rating over-side or 360 degrees		
		1.5 m		3.0 m		4.5 m		At max. reach		
										
Booms 3,72 m	4.5									meter
Arm 1,62 m										
Counterweight	3.0									
800 kg	1.5									
Grouser shoe										
450 mm	0 (Ground)									
	-1.5									

ZX70LC-56, Blade on Ground											Unit : kg
Conditions	Load point height m	Load radius				Rating over-front		Rating over-side or 360 degrees			
		1.5 m		3.0 m		4.5 m		At max. reach			
											
Boom 3.72 m	4.5										
Arm 2.12 m											
Counterweight	3.0										
800 kg	1.5										
Grouser shoe											
450 mm	0 (Ground)										
	-1.5										
	-3.0										

ZX70LC-56, Blade above Ground											Unit :
Conditions	Load point height m	Load radius								At max. reach	
		1.5 m		3.0 m		4.5 m		Railing over-front 	Railing over-side or 360 degrees 		
											
Boom 3.72 m	4.5										meter
Arm 1.62 m											
Counterweight	3.0										
800 kg	1.5										
Grouser shoe											
450 mm	0 (Ground)										
	-1.5										

ZX70LC-56, Blade above Ground										Unit : kg
Conditions	Load point height m	Load radius			Rating over-front		Rating over-side or 360 degrees			
		1.5 m	3.0 m	4.5 m						
										
Boom 3.72 m	4.5				*1 490	*1 480	*1 320	*1 320	meter	
Arm 2.12 m	3.0		*1 820		*1 820	*1 620	*1 270	*1 180	5.50	
Counterweight	1.5		*2 730		*2 730	*1 540	*1 210	*1 080	5.80	
800 kg										
Grouser shoe										
450 mm	0 (Ground)		3 110	2 630	1 680	1 470	1 240	1 100	5.60	
	-1.5	*3 550	3 060	2 590	1 650	1 450	1 450	1 280	5.00	
	-3.0	*4 990	*4 990	2 760			*2 130	*1 970	3.70	

Standard and optional equipment may vary by country, so please consult your Hitachi dealer for details.

ENGINE	CAB	MONITOR SYSTEM	UNDERCARRIAGE
Air cleaner	•	Alarm buzzers:	• Blade
Air cleaner double filters	•	Engine of pressure and engine overheat	• Bolt on sprocket
Alternator 60 A	•	Aux FM radio with digital clock	• Hydraulic track adjuster
Auto idle system	•	Ashtray	• Reinforced track links with pin seals
Cartridge-type engine oil filter	•	Auto control air conditioner	• Travel motor covers
Cartridge-type fuel pre-filter	•	Cigarette lighter 24V	• Travel parking brake
Cartridge-type fuel main filter	•	CHES Cab (Corner reinforced structure)	• Triple grouser shoe 450 mm
Dry-type air filter with evacuator valve with air filter restriction indicator)	•	Drink holder	• Upper and lower rollers
Dust-Proof Indoor net	•	Electric horn	FRONT ATTACHMENTS
Electric fuel feed pump	•	Engine stop switch	• Arm 1.62 m
E/P mode control	•	Evacuation hammer	• Arm 2.12 m
Fan guard	•	Fire extinguisher bracket	• Boom 3.72 m
Pre-cleaner	○	Floor mat	• Bucket clearance adjust mechanism
Radiator reserve tank	•	Footrest	• Bucket 0.28 m (ISO heaped)
Water separator	•	Front window washer	• Centralized lubrication system
	•	Front windows on upper, lower and left side can be opened	• Dirt seal on all bucket pins
	•	Glove compartment	• HN lashing
	•	Hot & cool box	• Monolithically cast bucket link A
	•	Intermittent windshield wipers	• Reinforced resin thrust plate
	•	Lower cab front guard	• WC (tungsten-carbide) thermal spraying
	•	OPG top guard Level I (ISO10262)	• 4-side reinforced arm
	•	compliant cab	ATTACHMENTS
	•	Pilot control shut-off lever	• Accessories for breaker
	•	Seat belt	• Accessories for breaker & crusher
	•	Seat : mechanical suspension seat	• Accessories for 2 speed selector
	•	Seat : vinyl seat	• Attachment basic piping
	•	Seat adjustment part : backrest, slide forward / back	
	•	Sun visor	OTHERS
	•	Upper cab front guard	• Global e-Service
	•	4 fluid-filled elastic mounts	



Built on the foundation of superb technological capabilities, Hitachi Construction Machinery is committed to providing leading-edge solutions and services to contribute as a reliable partner to the business of customers worldwide.

Hitachi Environmental Vision 2025

The Hitachi Group released the Environmental Vision 2025 to curb annual carbon dioxide emissions. The Group is committed to global production while reducing environmental impact in life cycles of all products, and realizing a sustainable society by tackling three goals — prevention of global warming, conservation of resources, and preservation of ecosystem.

Reducing Environmental Impact by New ZAXIS

Hitachi makes a green way to cut carbon emissions for global warming prevention according to LCA*. New ZAXIS utilizes lots of technological advances, including the new ECO mode, and Isochronous Control. Hitachi has long been committed to recycling of components, such as aluminum parts in radiators and oil cooler. Resin parts are marked for recycling.

*Life Cycle Assessment – ISO 14040

These specifications are subject to change without notice.

Illustrations and photos show the standard models, and may or may not include optional equipment, accessories, and all standard equipment with some differences in color and features.

Before use, read and understand the Operator's Manual for proper operation.